

B&C Plastics Ltd.


767 Mckay Road Pickering., Ontario. L1W 3A3 Tel: (905) 427 - 3324 Fax: (905) 427 -1548


info@bcplasticsltd.com www.bcplasticsltd.com Document Number: G2069G-SS Approved By: Corey Gambon corey@bcplasticsltd.com Revised: June 1 2010


Tall, round and sleek, our cylinders have great shelf presence and are easy to decorate, fill and pack. Part of the B&C Plastics Ltd. cylinder family which allows you to mix and match you many needs.

Performance Specifications:

Containers are manufactured with virgin high density polyethylene (HDPE) resins which conform to the Health Protection Branch in Canada and are in compliance with The Food and Drug Administration of the United States of America.

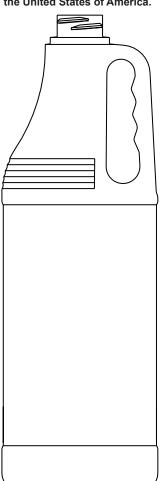

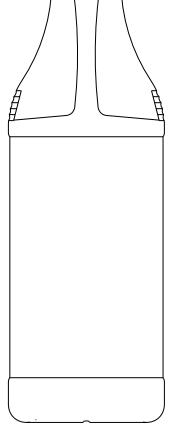



Dimensions and Weights:

Rated Capacity: 1000ml Regular Weight: 60 grams

Overflow Capacity: 1068ml Medium Duty Weight: On request

Height: 10.314" Heavy Duty Weight: On Request

Diameter: 3.385" Minimum Wall Thickness: 0.035"

Label Panel: H 4.730" x D 3.325" Neck Finish: M28 SP 400 Special "H"

Note: Container Dimensions may change according to weight and color.

Special Features:

Neck Finish: 28mm with a special "H" designed for Push Down and Turn Child Resistant

Closure. Will also accept standard M28 SP400 closures.

Surface Treatment: Containers are flame treated for labeling and silk screening.

Design:

Center opening design provides additional top load strength. Locator key for silk screening. Recessed label panel allows for protection of artwork. Convenience of a grippable handle and small opening for easier pouring.

Packaging and Shipping:

44.928 units Quantity per trailer 53': Quantity per Case: 144 units Pallets per trailer 53': 26 pallets 1728 units Quantity per Pallet: Pallet Weight: 105 kgs

Stock Sku's

Custom Options:

Lightweight at 52 grams.

B060-2069-G000-144 Natural PCR at 25 % (minimum required)

B060-2069-G002-144 White Controlled I.D. for fitment plug.

Custom Colors

Minimum Run 25,000 units.

Filling Recomendations

- Compatibility of containers with the fill product is sole responsibility of the end user.
- · Fill contents should not exceed 70 C (158 F) at time of fill.
- Filled containers should not be stacked and stored above 50 C (122 F)

Notice:

This drawing contains proprietary information of B&C Plastics Ltd. Neither this drawing of its contents may be used, undisclosed to others, or reproduced for any purpose other than that for which it is lent, without the express written permission of B&C Plastics Itd

© B&C Plastics Itd 2010

1 Litre Handlewere Mould Number(s): 2069G